


SWITCH WIRING DIAGRAM

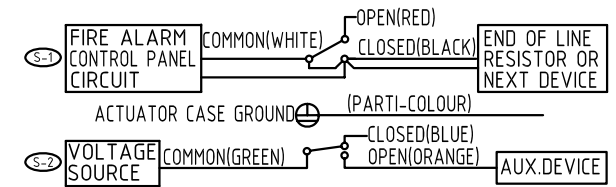

NOTES:

1. Connection standard: ISO7-1;
2. Working Pressure: 175PSI;
3. Working temperature: 0-80°C;
4. Coating:Fusion Bonded Epoxy Coating
Complies with ANSI/AWWA C550.

DN		Dimensions(mm)					
Inch	mm	L	H	H1	A	B	C(Rc)
1"	25	54	115	33	125	41	1
1.25"	32	67	117.5	37	125	49	1 1/4
1.5"	40	73	121	40.5	125	55.5	1 1/2
2"	50	82.5	131	48	125	71	2

9	Signal Gear Box	Carbon Steel
8	O-Ring	NBR
7	O-Ring	NBR
6	Stem	Stainless Steel
5	Disc	Carbon Steel+EPDM
4	O-Ring	NBR
3	Stem	Stainless Steel
2	Screw	Carbon steel Zinc Pland
1	Valve Body	EN-GJS-450-10
Part No.	Part&size	MATERIAL

DATE	REVISION	BY	MATERIAL:	DRAWN BY	DRAWING#	TITLE
				Li Cunfu	922XD311X4-27-0-E	FIG# Butterfly valve
				CHECKED BY	APPROVED BY	
			FINISH:	Ma Qinbo	Liu Shaoyun	
				SCALE	ISSUE DATE	JINAN MEIDE CASTING CO.,LTD.
					09-12-16	